




Atlas Minerals & Chemicals, Inc.

1227 Valley Road, PO Box 38 • Mertztown, Pennsylvania 19539-0038
610-682-7171 • Toll Free 800-523-8269 • Fax 610-682-9200
Email sales@atlasmin.com • Web site www.atlasmin.com

ChemPruf 2300 Lining System **(Chlorendic Anhydride Polyester)**

This file contains the following literature for ChemPruf 2300 Lining System

Pages 2 - 4 Data Sheet
Pages 5 - 10 Installation Instructions

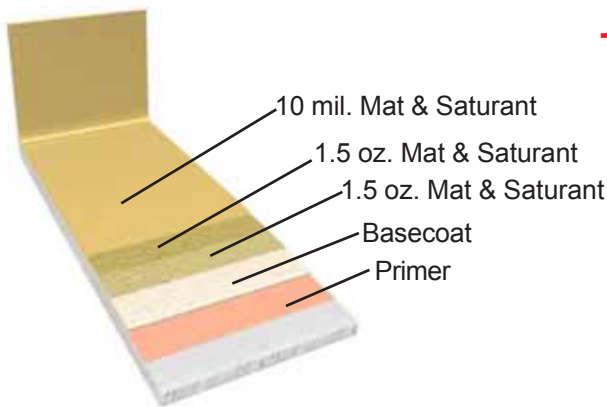

The ChemPruf 2300 Lining System

- Primer
- Basecoat (1/16")
- 1.5 oz. Mat & Saturant
- 1.5 oz. Mat & Saturant
- 10 mil Mat & Saturant

ChemPruf 2300 Lining System:
The trowel applied basecoat and three layers of fiberglass mat

Where to use the ChemPruf 2300 Lining System

- Storage Tanks
- Scrubbers & Absorbers
- Clarifiers
- Process Vessels
- Trenches
- Sumps



Atlas Minerals & Chemicals, Inc.



DATA SHEET

4-2300PI (5-01²)
Supersedes 4-2300PI (3-99)

CHEMPRUF 2300 Lining System

DESCRIPTION

CHEMPRUF 2300 Lining System is a highly chemical resistant fabric reinforced lining system. Applied to concrete and steel substrates, the CHEMPRUF 2300 Lining System is composed of a **chlorendic anhydride polyester** resin, an inert filled basecoat and fiberglass mat reinforcement. The 1/8" (3.2 mm.) lining can be used in immersion service to 180°F (82°C) and in intermittent service to 210°F (99°C). The CHEMPRUF 2300 Lining System is designed for primary or secondary containment applications for tanks, trenches, containment dikes, absorbers, scrubbers and floors. The CHEMPRUF 2300 Lining System may be used as a lining or as a membrane in conjunction with chemically resistant brick sheathing. When used as a membrane, the lining can be used at higher process temperatures.

CHEMICAL RESISTANCE

The CHEMPRUF 2300 Lining System provides resistance to a wide range of oxidizing and non-oxidizing acids, especially nitric acid to 50% and chromic acid to 50%, salts, organic acids, solvents and bleaches, such as chlorine dioxide. Refer to the CHEMPRUF 2000 SERIES Chemical Resistance Chart, 4-2000, for specific information.

ChemPruf 2300 Lining System is a silica filled basecoat, two layers of 1.5 oz./ft² reinforcing mat and a 10 mil surface mat.

CHEMPRUF 2300 LINING SYSTEM Consists of: PRIMER

ChemPruf VE Primer, a two-component, brush or roller applied penetrating primer.

BASECOAT

ChemPruf 2300, a chlorendic anhydride polyester resin, silica filled basecoat, trowel applied at a nominal thickness of 1/16" (1.6 mm.).

REINFORCING MAT

ChemPruf 1.5 oz. Reinforcing Mat, 1.5 oz./ft² (458 g./m²) random fiberglass reinforcing mat

ChemPruf 10 mil Surface Mat, 10 mil (0.25 mm.) polyester glass veil

PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL VALUE 2300
Density, Composite	ASTM C905	121 lb./cu. ft. (1.94 g./cc.)
Tensile Strength, Composite 7 days @ 77°F (25°C)	ASTM D638	2,100 psi. (14.5 MPa)
Compressive Strength, Mortar 7 days @ 77°F (25°C)	ASTM C579	10,000 psi. (68.9 MPa)
Flexural Strength, Composite 7 days @ 77°F (25°C)	ASTM C580	6,000 psi. (41.4 MPa)
Coefficient of Thermal Expansion, Composite in./in./°F (cm./cm./°C)	ASTM C531	1.5 x 10 ⁻⁵ (2.7 x 10 ⁻⁵)
Temp. Resistance, Composite Immersion Continual, °F (°C) Immersion Intermittent, °F (°C) Dry Heat, °F (°C)		180°F (82°C) 210°F (99°C) 350°F (177°C)
Hardness, Barcol		45
Cure Rate @ 77°F (25°C), Max. Chemical Resistance		7 days

SATURANT

ChemPruf 2300 Saturant, a chlorendic anhydride polyester resin, roller applied to the reinforcing mat.

FINISHER* (OPTIONAL)

ChemPruf 300, a two-component chlorendic anhydride polyester resin, brush or roller applied sealer.

ChemPruf 130, a two-component, flake filled chlorendic anhydride polyester resin, brush or roller applied sealer.

*Depending on service conditions, ATLAS may recommend use of an optional finisher.

AVAILABLE COLORS

ChemPruf 2300 is available in natural and gray.

ChemPruf 300 is available in white and gray.

ChemPruf 130 is available in white and gray.

ADDITIONAL INFORMATION

For specific information pertaining to Surface Preparation, Packaging or Mixing and Application, refer to the following ATLAS literature:

- Surface Preparation Data Sheet (PS-30)
- ChemPruf 2300 Lining System Installation Instructions (I-4-2300)
- ChemPruf 130 Data Sheet (4-130PI)
- Lining System Termination Drawing (4-3000DG)
- Termination at Drain Drawing (4-3001DG)
- Control Joint & Structural Crack Drawing (4-3003DG)

- Horizontal / Vertical Transition Drawing (4-3004DG)
- Pipe Outlets Drawing (4-3005DG)

SURFACE PREPARATION

The substrate must be structurally sound, clean, dry and free of all contaminants, such as sealers, curing compounds, coatings, oil, dirt, dust and water. Previously applied coatings or paint must be removed.

Concrete: The prepared concrete substrate shall have a minimum tensile strength of 250 psi. (1.72 MPa). Concrete surface must be sufficiently cured and comply with moisture testing as prescribed by ACI Test Method 515 R-16 "Dryness of Surface". Concrete surfaces should be grit blasted to a finish similar to the profile of 100 to 120 grit sandpaper. Cracks in the concrete substrate 1/16" (1.6 mm.) wide or greater must be opened to a minimum 1/4" (6.4 cm.) cleaned, primed and filled with ChemPruf 2300.

Carbon Steel: Metal surfaces should be grit blasted to a SSPC-SP5 or NACE #1 white metal blast cleaned surface finish. Profile height must be 3 (0.076 mm.) to 4 mils (0.102 mm.).

TEMPERATURE DURING APPLICATION

Store all materials referred to in this Data Sheet at 70°F (21°C) to 80°F (27°C) for 24 hours prior to use. Minimum temperature for installation is 65°F (18°C). Do not apply when the relative humidity is greater than 75% or the substrate temperature is less than 5°F (3°C) above the dew point.

APPLICATION

1. Apply ChemPruf VE Primer with a brush or roller.
2. Trowel apply a 1/16" (1.6 mm.) basecoat of ChemPruf 2300. Imbed the first layer of ChemPruf 1.5 oz. Reinforcing Mat and roll into the wet basecoat. Apply ChemPruf 2300 saturant with a medium nap roller.
3. Immediately apply second layer of ChemPruf 1.5 oz. Reinforcing Mat and apply ChemPruf 2300 Saturant with a medium nap roller.
 - Immediately apply ChemPruf 10 mil Surface Mat and apply ChemPruf 2300 Saturant with a medium nap roller. Allow saturant coat to harden.
4. If ATLAS recommends use of an optional finisher, apply a 5 mil coat of ChemPruf 300 or ChemPruf 130 with a short nap roller. Depending on service conditions, two coats may be required.

Protect uncured primer, basecoat, saturant, mat and optional finisher coat(s) from moisture contamination until minimum cure time is attained.

INSPECTION

1. Inspect lining for imperfections after basecoat, mats and saturant have hardened. Repair defects and imperfections prior to application of the optional finisher coat(s).

2. When specified or required, spark test for pinholes using 100 volts per mil (0.025 mm.) of lining thickness. Spark testing of ChemPruf 2300 Lining System applied to concrete substrates requires ChemPruf VE Primer with ATLAS® Carbon Powder.

MEMBRANE

When the ChemPruf 2300 Lining System is to be used as a membrane with chemical resistant masonry sheathing, a release agent, such as silicone or paste wax, must be applied to the surface of the lining system. Apply the release agent after the ChemPruf 2300 Lining System has attained the minimum drying time. The use of a release agent allows the masonry sheathing to move independent of the lining system.

PRODUCT SPECIFICATION

The lining system shall be ChemPruf 2300 Lining System as manufactured by Atlas Minerals & Chemicals, Inc.

ChemPruf 2300 Lining System, a chlorendic anhydride polyester resin silica filled basecoat, two layers of 1.5 oz./ft² reinforcing mat and a 10 mil surface mat each saturated with a chlorendic anhydride polyester resin. Service conditions as determined by the manufacturer may require the application of the optional ChemPruf 300 or ChemPruf 130.

CLEANING OF TOOLS AND EQUIPMENT

Steel wool, soap and warm water will remove the materials referred to in this Data Sheet from mixing tools and equipment if cleaning is done immediately after use. Solvents, such as methyl ethyl ketone, toluene or xylene, will have to be used after the material has begun to harden. Fully hardened material will have to be removed by mechanical means.

Dispose of residues and wastes in accordance with the directions in the Material Safety Data Sheets and government regulations.

STORAGE AND SHELF LIFE

Store all materials in a cool, dry environment and out of direct sunlight. Store all ChemPruf Resins and Hardeners at a temperature between 40°F (4°C) and 60°F (16°C) and protect from freezing. In unopened original containers, ChemPruf VE Primer Resin and Hardener, ChemPruf 2300 Resin and Hardener and ChemPruf 300 Resin and Hardener have a shelf life of approximately five months. ChemPruf 2000 S Powder, ATLAS Carbon Powder, ChemPruf 10 mil Surface Mat and ChemPruf 1.5 oz. Reinforcing Mat can be stored indefinitely.

MAINTENANCE

Should the liner be damaged in any way, it can be repaired by thoroughly cleaning and reapplying the ChemPruf 2300 Lining System.

PRECAUTIONS

The materials referred to in this Data Sheet are for Industrial Use Only. They contain materials that present handling and potential health hazards. Consult Material Safety Data Sheets and the container labels for complete precautionary information.

TECHNICAL SERVICES

ATLAS maintains a staff of Technical Service Representatives who are available to assist you with the use of ATLAS products. In the event of difficulties with the application of ATLAS materials, the installation should be stopped immediately and ATLAS' Technical Service Department consulted for assistance.

WARRANTY

ATLAS warrants that its products will be free from defects in workmanship and materials under normal use for a period of one (1) year from the date of shipment by ATLAS (provided the products are installed before the expiration of the shelf life). THERE ARE NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR THE PURPOSE FOR THIS PRODUCT WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. ATLAS' LIABILITY FOR ALLEGED BREACH OF THIS WARRANTY SHALL BE LIMITED TO REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT (BUT NOT INCLUDING REMOVAL OF THE DEFECTIVE PRODUCT OR INSTALLATION OF REPLACEMENT PRODUCTS). ATLAS SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES DURING THE WARRANTY PERIOD OR THEREAFTER. **ATLAS' WARRANTY IS VOIDED IF PAYMENT FOR PRODUCT IS NOT RECEIVED IN FULL.**

atlas Installation Instructions

Atlas Minerals & Chemicals, Inc.



I-4-2300 (10-02²)
Supersedes I-4-2300 (3-02)

CHEMPRUF 2300 Lining System

DESCRIPTION

CHEMPRUF 2300 Lining System consists of a 1/16" (1.6 mm.) trowel applied basecoat of ChemPruf 2300, three intermediate layers of fiberglass mat reinforcement saturated with ChemPruf 2300 saturant and a roll applied finisher of ChemPruf 300 or ChemPruf 130, Installation Instructions (I-4-130).

ESTIMATED COVERAGE

CHEMPRUF VE PRIMER

1-Gallon Unit 200 ft² (18.6 m²)
5-Gallon Unit 1,100 ft² (102 m²)

CHEMPRUF VE CONDUCTIVE PRIMER

1-Gallon Unit 120 ft² (11.1 m²)
5-Gallon Unit 660 ft² (61.3 m²)
ATLAS® Carbon Powder* 2,300 ft² (213.7 m²)

*Per pail for Conductive Primer

CHEMPRUF 2300 (Basecoat)

5-Gallon Unit
Basecoat @ 1/16" (1.6 mm.) 239 ft² (22.2 m²)

CHEMPRUF 2300 (Saturant)

5-Gallon Unit
Total System 127 ft² (11.8 m²)
First Coat 303 ft² (28.1 m²)
Second Coat 346 ft² (32.1 m²)
Third Coat 605 ft² (56.2 m²)

CHEMPRUF 1.5 OZ. REINFORCING MAT

2.2 ft² (0.2 m²) per ft² (0.09 m²)

CHEMPRUF 10 MIL SURFACE MAT

1.1 ft² (0.1 m²) per ft² (0.09 m²)

CHEMPRUF 300 (Optional Finisher)

3/4-Gal. Unit @ 5 mils (0.13 mm.) 251 ft² (23.3 m²)
4-1/2-Gal. Unit @ 5 mils (0.13 mm.) 1,367 ft² (127 m²)

CHEMPRUF FINISHER ADDITIVE*

One - 4 oz. (113 g.) can per 3/4-gallon unit ChemPruf 300
One - 20 oz. (567 g.) can per 4-1/2-gal. unit ChemPruf 300 or 5-gal. unit of ChemPruf 2300 saturant
*Combined with the final coat of ChemPruf 300 if optional ChemPruf 300 is specified or final coat of ChemPruf 2300 saturant if ChemPruf 300 is not specified.

Note: All references to application thickness and coverage per unit in this Installation Instructions are WFT (wet film thickness). Material estimating quantities may vary depending on project conditions and application techniques. Material quantities are theoretical and do not include a safety factor.

PACKAGING

CHEMPRUF VE PRIMER

1-Gal. Unit (8 lb. [3.6 kg.]) Consisting of:

One - 1-gal. can ChemPruf VE Primer Resin (7 lb. 13 oz. [3.5 kg.])
One - bottle ChemPruf VE Primer Hardener (2.5 oz. [71 g.])

5-Gal. Unit (43 lb. 14 oz. [19.9 kg.]) Consisting of:

One - 5-gal. pail ChemPruf VE Primer Resin (43 lb. [19.5 kg.])
One - bottle ChemPruf VE Primer Hardener (14 oz. [397 g.])

ATLAS CARBON POWDER (for Conductive Primer)

5-gal. pail (38 lb. [17.2 kg.])

CHEMPRUF 2300 (Basecoat)

5-Gal. Unit (151 lb. 6 oz. [68.7 kg.]) Consisting of:

One - 5-gal. pail ChemPruf 2300 Resin (42 lb. 8 oz. [19.3 kg.])
One - bottle ChemPruf 2300 Hardener (13.6 oz. [386 g.])
Two - bags ChemPruf 2000 S Powder (54 lb. [24.5 kg.]) ea.

CHEMPRUF 2300 (Saturant)

5-Gal. Unit (43 lb. 6 oz. [19.7 kg.]) Consisting of:

One - 5-gal. pail ChemPruf 2300 Resin (42 lb. 8 oz. [19.3 kg.])
One - bottle ChemPruf 2300 Hardener (13.6 oz. [386 g.])

CHEMPRUF 1.5 OZ. REINFORCING MAT, 1.5 oz./ft²

(458 g./m²) random fiberglass reinforcing mat, 38" (97 cm.) wide roll

CHEMPRUF 10 MIL SURFACE MAT, 10 mil

(0.25 mm.) polyester glass veil, 48" (122 cm.) wide roll

**CHEMPRUF 300 (Optional Finisher)
3/4-Gallon Unit (8 lb. [3.6 kg.]) Consisting of:**

One - 1-gal. can ChemPruf 300 Resin
(7 lb. 13 oz. [3.5 kg.])
One - bottle ChemPruf 300 Hardener
(2.5 oz. [71 g.])

4-1/2-Gal. Unit (43 lb. 6 oz. [19.7 kg.]) Consisting of:

One - 5-gal. pail ChemPruf 300 Resin
(42 lb. 8 oz. [19.3 kg.])
One - bottle ChemPruf 300 Hardener
(13.6 oz. [386 g.])

CHEMPRUF FINISHER ADDITIVE

4 oz. [113 g.] can
1-qt. can (1 lb. 4 oz. [567 g.])

AVAILABLE COLORS

ChemPruf 2300 is available in natural and gray.
ChemPruf 300 is available in white and gray.

SURFACE PREPARATION

ChemPruf 2300 Lining System can be applied to concrete and steel surfaces. The substrate must be structurally sound, clean, dry and free of all contaminants, such as sealers, curing compounds, coatings, oil, dirt, dust and water. Previously applied coatings or paint must be removed.

Concrete: Finished concrete must be free of ridges, protrusions, fins, mortar splatter and have a tight laitance-free steel trowel finish. Abrasive grit blasting is recommended. Where impractical, chemical preparation by acid washing is acceptable. A finish similar to the profile of 100 to 120 grit sandpaper is suggested.

The prepared concrete substrate shall have a minimum tensile strength of 250 psi. (1.72 MPa). Concrete surface must be sufficiently cured and comply with moisture testing as prescribed by ACI Test Method 515 R-16 "Dryness of Surface".

Carbon Steel: Metal surfaces should be grit blasted to a SSPC-SP5 or NACE #1 white metal blast cleaned surface finish. Profile height must be 3 (0.076 mm.) to 4 mils (0.102 mm.).

The primer will hold the finish on carbon steel for approximately two weeks at relative humidity of 75%. Should flash rusting occur at any time before ChemPruf 2300 basecoat is applied, the surface must be grit blasted again and reprimed.

For additional information, refer to Surface Preparation, Data Sheet PS-30.

TEMPERATURE / HUMIDITY DURING APPLICATION

Store all materials referred to in this Installation Instructions at 70°F (21°C) to 80°F (27°C) for 24 hours prior to use. The best working characteristics of the materials will be attained when the temperature of the substrate, air and ChemPruf 2300 Lining System components are between 65°F (18°C) and 85°F (29°C).

Minimum temperature for installation is 65°F (18°C). At temperatures below 65°F (18°C), the product may not set or cure properly.

Do not apply when the relative humidity is greater than 75% or the substrate temperature is less than 5°F (3°C) above the dew point.

CONSTRUCTION DETAILS

For additional information on Construction Details, refer to the following ATLAS literature:

- Surface Preparation Data Sheet (PS-30)
- Horizontal / Vertical Transition Drawing (4-3004DG)
- Structural Crack Drawing (4-3006DG)
- Control Joint Drawing (4-3003DG)
- Lining System Termination Drawing (4-3000DG)
- Termination at Drain Drawing (4-3001DG)
- Pipe Outlets Drawing (4-3005DG)

Protect uncured primer, basecoat, saturant, mat and optional finisher coat(s) from moisture contamination until minimum cure time is attained.

When applying ChemPruf 2300 Lining System directly to a latex modified concrete substrate, apply a barrier coat of Ureklad® Primer (7-23PI) before applying ChemPruf VE Primer.

Do not apply the ChemPruf 2300 Lining System to substrates that flex.

INSTALLATION EQUIPMENT AND SUPPLIES*

- KOL type mixer & Jiffy type mixer
- 5-gallon (18.9 liter) plastic or metal containers
- Cement finishing, margin & pointing trowels
- Short (3/16" to 1/4") & medium (3/8") nap paint rollers
- Paint brushes
- Rubber & cotton gloves
- Organic respirator, Safety goggles
- Electric grinder
- Scissors, measuring tape, chalk line, felt tip marker

*The safety equipment listed above is the minimum required to install the ChemPruf 2300 Lining System. The installer must provide any equipment necessary to comply with existing federal, state, local and customer safety regulations.

**APPLICATION OF THE
CHEMPRUF 2300 LINING SYSTEM**

1. **Primer:** All substrates must be primed with ChemPruf VE Primer. Apply ChemPruf VE Primer with a brush or medium nap roller. Do not allow puddling. Work ChemPruf VE Primer into the pores of concrete substrates.

The primed surface should be tacky or dry before applying ChemPruf 2300 basecoat. If the primer is allowed to dry for longer than the maximum drying time, the surface must be sanded and the area reprimed before proceeding.

Conductive Primer: When the ChemPruf 2300 Lining System is applied to concrete substrates, spark testing of the lining may be specified or required. Apply ChemPruf VE Primer with ATLAS Carbon Powder. Stir the mixed components frequently during the application to avoid settlement of the carbon powder. Apply as described above.

CHEMPRUF VE PRIMER			
Temperature	Working Time	Minimum Drying Time	Maximum Drying Time
65°F (18°C)	40 min.	8 hours	7 days
75°F (24°C)	30 min.	6 hours	6 days
85°F (29°C)	20 min.	4 hours	5 days

2a. **Basecoat:** Trowel apply a basecoat of ChemPruf 2300 at a thickness of 1/16" (1.6 mm.) with a plaster's or concrete finishing trowel.

2b. **1.5 oz. Mat:** Immediately apply the ChemPruf 1.5 oz. Reinforcing Mat into the wet basecoat. Roll the mat with a medium nap roller to imbed the mat into the ChemPruf 2300 basecoat. Roll the mat from the center to the edges to smooth the surface and remove entrapped air.

2c. **Saturant:** Immediately apply a mixture of ChemPruf 2300 Resin and Hardener as a saturant over the mat with a medium nap roller. Roll the saturated mat thoroughly with a ribbed metal roller until all entrapped air is removed. Use only enough saturant to remove the whiteness and produce a uniform darker appearance to the mat. Roll the mat from the center to the edges. A brush may be used to apply saturant in corners and around appurtenances.

2d. **1.5 oz. Mat & Saturant:** Immediately apply a second layer of ChemPruf 1.5 oz. Reinforcing Mat. Roll the mat with a mixture of ChemPruf 2300 Resin and Hardener as described in Step (2c.).

2e. **10 mil Mat & Saturant:** Immediately apply the ChemPruf 10 mil Surface Mat and roll with a medium nap roller to stabilize the position onto the previous saturant coat. Roll the ChemPruf 10 mil Surface Mat with a mixture of ChemPruf 2300 Resin and Hardener as described in Step (2c.).

Allow saturant coat to harden sufficiently so that the mat will not be disturbed before continuing with the finisher coat(s).

Note: Refer to the "Special Mixing Instructions" for the final coat of ChemPruf 2300 saturant if the optional finisher is not specified.

If the saturant is allowed to dry for longer than the maximum drying time, the surface must be sanded, cleaned and reprimed before applying the ChemPruf 300 or ChemPruf 130.

CHEMPRUF 2300 (Basecoat / Saturant)			
Temperature	Working Time	Minimum Drying Time	Maximum Drying Time
65°F (18°C)	35 min.	16 hours	24 hours
75°F (24°C)	30 min.	12 hours	24 hours
85°F (29°C)	20 min.	8 hours	16 hours

3. **Inspection:** Inspect lining for imperfections after basecoat, mat and saturant have hardened. Repair defects and imperfections prior to application of the finisher coat(s).

When specified or required, spark test for pinholes using 100 volts per mil (0.025 mm.) of lining thickness. Spark testing of ChemPruf 2300 Lining System applied to concrete substrates requires ChemPruf VE Primer with ATLAS Carbon Powder.

4. **Optional Finisher:** If specified, apply a 5 mil (0.13 mm.) coat of ChemPruf 300 with a short nap roller. If ChemPruf 130 is specified, refer to Installation Instructions, I-4-130. Depending on service conditions, two coats may be required. If the ChemPruf 300 is allowed to dry for longer than the maximum drying time, the surface must be sanded, cleaned and reprimed before applying a second finisher coat.

CHEMPRUF 300			
Temperature	Working Time	Minimum Drying Time	Maximum Drying Time
65°F (18°C)	35 min.	12 hours	24 hours
75°F (24°C)	30 min.	8 hours	24 hours
85°F (29°C)	25 min.	7 hours	16 hours

MEMBRANE

When applying a masonry sheathing over the ChemPruf 2300 Lining System, a release agent must be applied to the surface of the lining system. The use of a release agent allows the masonry sheathing to move independent of the lining system. Silicone or paste wax can be applied after the maximum drying time.

MIXING OF THE CHEMPRUF VE PRIMER

Stir the contents of the individual resin and hardener containers prior to blending. Mixing of the components should be done with a hand drill equipped with a "Jiffy" type mixer at a mixing speed between 300 and 500 RPM. During mixing, move the mixing blade in circular and up and down motions scraping all sides and the bottom of the mixing container.

1-Gallon Unit of ChemPruf VE Primer

The following mixing instructions are for a batch size of 0.9 gallons (3.5 liters). Estimated coverage of the batch size is 200 ft² (18.6 m²). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

- Combine the contents of the 7 lb. 13 oz. (3.5 kg.) can of ChemPruf VE Primer Resin with the contents of the 2.5 oz. (71 g.) bottle of ChemPruf VE Primer Hardener.
- Mix thoroughly for two minutes as described above.

5-Gallon Unit of ChemPruf VE Primer

The following mixing instructions are for a batch size of 0.9 gallons (3.5 liters) or 8 lb. (3.6 kg.).

Estimated coverage of the batch size is 200 ft² (18.6 m²). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

- Combine 116 fluid ounces (3.45 liters) of ChemPruf VE Primer Resin with 2.4 fluid ounces (71 ml.) ChemPruf VE Primer Hardener* in a suitable mixing container.
*2.4 fluid ounces equals 4.7 tablespoons.
- Mix thoroughly for two minutes as described above.

MIX RATIO OF THE CHEMPRUF VE PRIMER

	by Weight	by Volume
ChemPruf VE Primer Resin	100	100
ChemPruf VE Primer Hardener	2	2.1

Conductive Primer

- Mix the ChemPruf VE Primer Resin and Hardener as described above.
- Add 1 lb. 15 oz. (879 g.) or approximately 36 fluid ounces (1.1 liters) of ATLAS Carbon Powder. Mix thoroughly for approximately two minutes. During application, stir the mixed components frequently to avoid settlement of the carbon powder.

MIX RATIO OF THE CONDUCTIVE PRIMER

	by Weight	by Volume
ChemPruf VE Primer Resin	100	100
ChemPruf VE Primer Hardener	2	2.1
ATLAS Carbon Powder	25	31

MIXING OF THE CHEMPRUF 2300 (Basecoat)

Stir the contents of the individual resin and hardener containers prior to blending. Mixing of the components should be with a KOL type mixer with a 5-gallon capacity. Mixing speed should be between 60 and 75 RPM.

The following mixing instructions are for a batch size of 37 lb. 13 oz. (17.2 kg.) or 0.31 ft³ (8.8 liters). Estimated coverage of the batch size is 59 ft² (5.5 m²) @ 1/16" (1.6 mm.). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

- Evenly divide the contents of one of the 54 lb. (24.5 kg.) bags of ChemPruf 2000 S Powder into two equal parts by volume using two clean, dry 5-gallon pails. Each pail should contain 27 lb. (12.2 kg.) or approximately 301 fluid ounces (8.9 liters) of powder.
- Combine 142 fluid ounces (4.19 liters) of ChemPruf 2300 Resin with 3.3 fluid ounces (97 ml.) ChemPruf 2300 Hardener* in the 5-gallon capacity mechanical mixer. Mix thoroughly for approximately two minutes.
*3.3 fluid ounces equals 6.4 tablespoons.
- Slowly add a 1/2 bag of ChemPruf 2000 S Powder, 27 lb. (12.2 kg.), as prepared in Step (a.).

- Mix the combined components for approximately two minutes or until all the powder is thoroughly dispersed.

The amount of the powder may be varied slightly to obtain the desired consistency. Decreasing the powder component will decrease the estimated unit coverage. The amount of powder must be within 5%, by weight, of the suggested amount.

MIX RATIO OF THE CHEMPRUF 2300 (Basecoat)

	by Weight	by Volume
ChemPruf 2300 Resin	100	100
ChemPruf 2300 Hardener	2	2.3
ChemPruf 2000 S Powder	260	213

MIXING OF THE CHEMPRUF 2300 (Saturant)

Note: Refer to the "Special Mixing Instructions" for the final coat of ChemPruf 2300 saturant if the optional finisher is not specified.

Stir the contents of the individual resin and hardener containers prior to blending. Mixing of the components may be done with a hand drill equipped with a "Jiffy" type mixer at a mixing speed between 300 and 500 RPM. During mixing, move the mixing blade in circular and up and down motions scraping all sides and the bottom of the mixing container.

The following mixing instructions are for a batch size of 1.1 gallons (4.3 liters) or 10 lb. 13 oz. (4.9 kg.).

Estimated coverage of the batch size:

First Coat	75 ft ² (7.0 m ²)
Second Coat	86 ft ² (8.0 m ²)
Third Coat	151 ft ² (14.0 m ²)

Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

- Combine 142 fluid ounces (4.19 liters) of ChemPruf 2300 Resin with 3.3 fluid ounces (97 ml.) ChemPruf 2300 Hardener* in a suitable mixing container.
*3.3 fluid ounces equals 6.4 tablespoons.
- Mix thoroughly for two minutes as described above.

MIX RATIO OF THE CHEMPRUF 2300 (Saturant)

	by Weight	by Volume
ChemPruf 2300 Resin	100	100
ChemPruf 2300 Hardener	2	2.3

MIXING OF THE CHEMPRUF 300 (Optional Finisher)

Add ChemPruf Finisher Additive to the final coat of ChemPruf 300. If a single coat is specified, apply ChemPruf 300 mixed with ChemPruf Finisher Additive. Stir the contents of the individual resin and hardener containers prior to blending. Mixing of the components may be done with a hand drill equipped with a "Jiffy" type mixer at a mixing speed between 300 and 500 RPM. During mixing, move the mixing blade in circular and up and down motions scraping all sides and the bottom of the mixing container.

3/4-Gallon Unit of ChemPruf 300

The following mixing instructions are for a batch size of 0.78 gallons (3.0 liters). Estimated coverage of the batch size is 251 ft² (23.3 m²) @ 5 mils (0.13 mm.). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

Coat(s) without ChemPruf Finisher Additive

- Combine the contents of the 7 lb. 13 oz. (3.5 kg.) can of ChemPruf 300 Resin with one 2.5 oz. (71 g.) bottle of ChemPruf 300 Hardener in a suitable mixing container.
- Mix thoroughly for two minutes as described above.

Final Coat with ChemPruf Finisher Additive

- Combine the 7 lb. 13 oz. (3.5 kg.) can of ChemPruf 300 Resin with one 4 oz. (113 g.) can of ChemPruf Finisher Additive in a suitable mixing container and mix thoroughly for two minutes.
- Add the 2.5 oz. (71 g.) bottle of ChemPruf 300 Hardener and mix thoroughly for two minutes as described above.

4-1/2-Gallon Unit of ChemPruf 300

The following mixing instructions are for a batch size of 1.0 gallons (3.8 liters) or 10 lb. 7 oz. (4.7 kg.). Estimated coverage of the batch size is 329 ft² (30.3 m²) @ 5 mils (0.13 mm.). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

Coat(s) without ChemPruf Finisher Additive

- Combine 128 fluid ounces (3.79 liters) of ChemPruf 300 Resin with 3.1 fluid ounces (91 ml.) ChemPruf 300 Hardener*.
*3.1 fluid ounces equals 6.1 tablespoons.
- Mix thoroughly for two minutes as described above.

Final Coat with ChemPruf Finisher Additive

- Combine 128 fluid ounces (3.79 liters) of ChemPruf 300 Resin with 5.2 fluid ounces (153 ml.) of ChemPruf Finisher Additive* and mix thoroughly for two minutes.
*5.2 fluid ounces equals 10.2 tablespoons.
- Add 3.1 fluid ounces (91 ml.) ChemPruf 300 Hardener* and mix thoroughly for two minutes as described above.
*3.1 fluid ounces equals 6.1 tablespoons.

MIX RATIO OF THE CHEMPRUF 300

	by Weight	by Volume
ChemPruf 300 Resin	100	100
ChemPruf 300 Hardener	2	2.4
ChemPruf Finisher Additive	2.9	4

SPECIAL MIXING INSTRUCTIONS**Final Coat of CHEMPRUF 2300 (Saturant)
If optional finisher is not specified**

Stir the contents of the individual resin and hardener containers prior to blending. Mixing of the

components may be done with a hand drill equipped with a "Jiffy" type mixer at a mixing speed between 300 and 500 RPM. During mixing, move the mixing blade in circular and up and down motions scraping all sides and the bottom of the mixing container.

The following mixing instructions are for a batch size of 1.1 gallons (4.3 liters) or 10 lb. 13 oz. (4.9 kg.). Estimated coverage of the batch size is 151 ft² (14.0 m²). Proportionally increase or decrease component quantities to attain larger or smaller batch sizes.

- Combine 142 fluid ounces (4.19 liters) of ChemPruf 2300 Resin with 5.4 fluid ounces (159 ml.) ChemPruf Finisher Additive* in a suitable mixing container and mix thoroughly for two minutes as described above.
*5.4 fluid ounces equals 10.6 tablespoons.
- Add 3.3 fluid ounces (97 ml.) ChemPruf 2300 Hardener* and mix thoroughly for two minutes as described above.
*3.3 fluid ounces equals 6.4 tablespoons.

MIX RATIO OF THE CHEMPRUF 2300 (Saturant)

(If optional finisher is not specified)

	by Weight	by Volume
ChemPruf 2300 Resin	100	100
ChemPruf 2300 Hardener	2	2.3
ChemPruf Finisher Additive	2.9	3.8

CLEANING OF TOOLS AND EQUIPMENT

Steel wool, soap and warm water will remove the materials referred to in this Data Sheet from mixing tools and equipment if cleaning is done immediately after use. Solvents, such as methyl ethyl ketone, toluene or xylene, will have to be used after the material has begun to harden. Fully hardened material will have to be removed by mechanical means.

Dispose of residues and wastes in accordance with the directions in the Material Safety Data Sheets and government regulations.

STORAGE AND SHELF LIFE

Store all materials in a cool, dry environment and out of direct sunlight. Store all ChemPruf Resins and Hardeners at a temperature between 40°F (4°C) and 60°F (16°C) and protect from freezing. In unopened original containers, ChemPruf VE Primer Resin and Hardener, ChemPruf 2300 Resin and Hardener, and ChemPruf 300 Resin and Hardener have a shelf life of approximately five months. ChemPruf Finisher Additive has a shelf life of approximately nine months. ChemPruf 2000 S Powder, ATLAS Carbon Powder, ChemPruf 1.5 oz. Reinforcing Mat and ChemPruf 10 mil Surface Mat can be stored indefinitely.

MAINTENANCE

Should the lining be damaged in any way, it can be repaired by thoroughly cleaning and reapplying the ChemPruf 2300 Lining System. Mix and apply in accordance with the instructions provided in this Installation Instructions sheet.

1. Determine all areas that have been damaged.
2. Grind or sand to expose the substrate 1" (25.4 mm.) to 2" (50.8 mm.) beyond the damaged area.
3. Grind or sand the surface of the ChemPruf 2300 Lining System. Taper the ChemPruf Lining to expose 2" (50.8 mm.) to 4" (101.6 mm.) of each layer of the ChemPruf 2300 Lining System.
4. Clean and remove all debris from Step (2.) and Step (3.).
5. Apply ChemPruf Tie-Coat, Data Sheet 4-90PI, to the exposed tapered edges of the ChemPruf 2300 Lining System. Allow the ChemPruf Tie-Coat to dry.
6. Apply ChemPruf VE Primer to the substrate and exposed tapered edges of the ChemPruf 2300 Lining System.
7. Apply the ChemPruf 2300 basecoat, ChemPruf 1.5 oz. Reinforcing Mats, ChemPruf 10 mil Surface Mat and ChemPruf 2300 saturant. Allow to harden.
8. Apply ChemPruf 300 or ChemPruf 130 if specified.

Rezklad® VE-Primer and Atlastacrete VE Primer are substitutes for ChemPruf VE Primer.

PRECAUTIONS

The materials referred to in this Data Sheet are for Industrial Use Only. They contain materials that present handling and potential health hazards. Consult Material Safety Data Sheets and the container labels for complete precautionary information.

TECHNICAL SERVICES

ATLAS maintains a staff of Technical Service Representatives who are available to assist you with the use of ATLAS products. In the event of difficulties with the application of ATLAS materials, the installation should be stopped immediately and ATLAS' Technical Service Department consulted for assistance.

WARRANTY

ATLAS warrants that its products will be free from defects in workmanship and materials under normal use for a period of one (1) year from the date of shipment by ATLAS (provided the products are installed before the expiration of the shelf life). THERE ARE NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR THE PURPOSE FOR THIS PRODUCT WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. ATLAS' LIABILITY FOR ALLEGED BREACH OF THIS WARRANTY SHALL BE LIMITED TO REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT (BUT NOT INCLUDING REMOVAL OF THE DEFECTIVE PRODUCT OR INSTALLATION OF REPLACEMENT PRODUCTS). ATLAS SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES DURING THE WARRANTY PERIOD OR THEREAFTER. **ATLAS' WARRANTY IS VOIDED IF PAYMENT FOR PRODUCT IS NOT RECEIVED IN FULL.**